




Inverter **Technology**



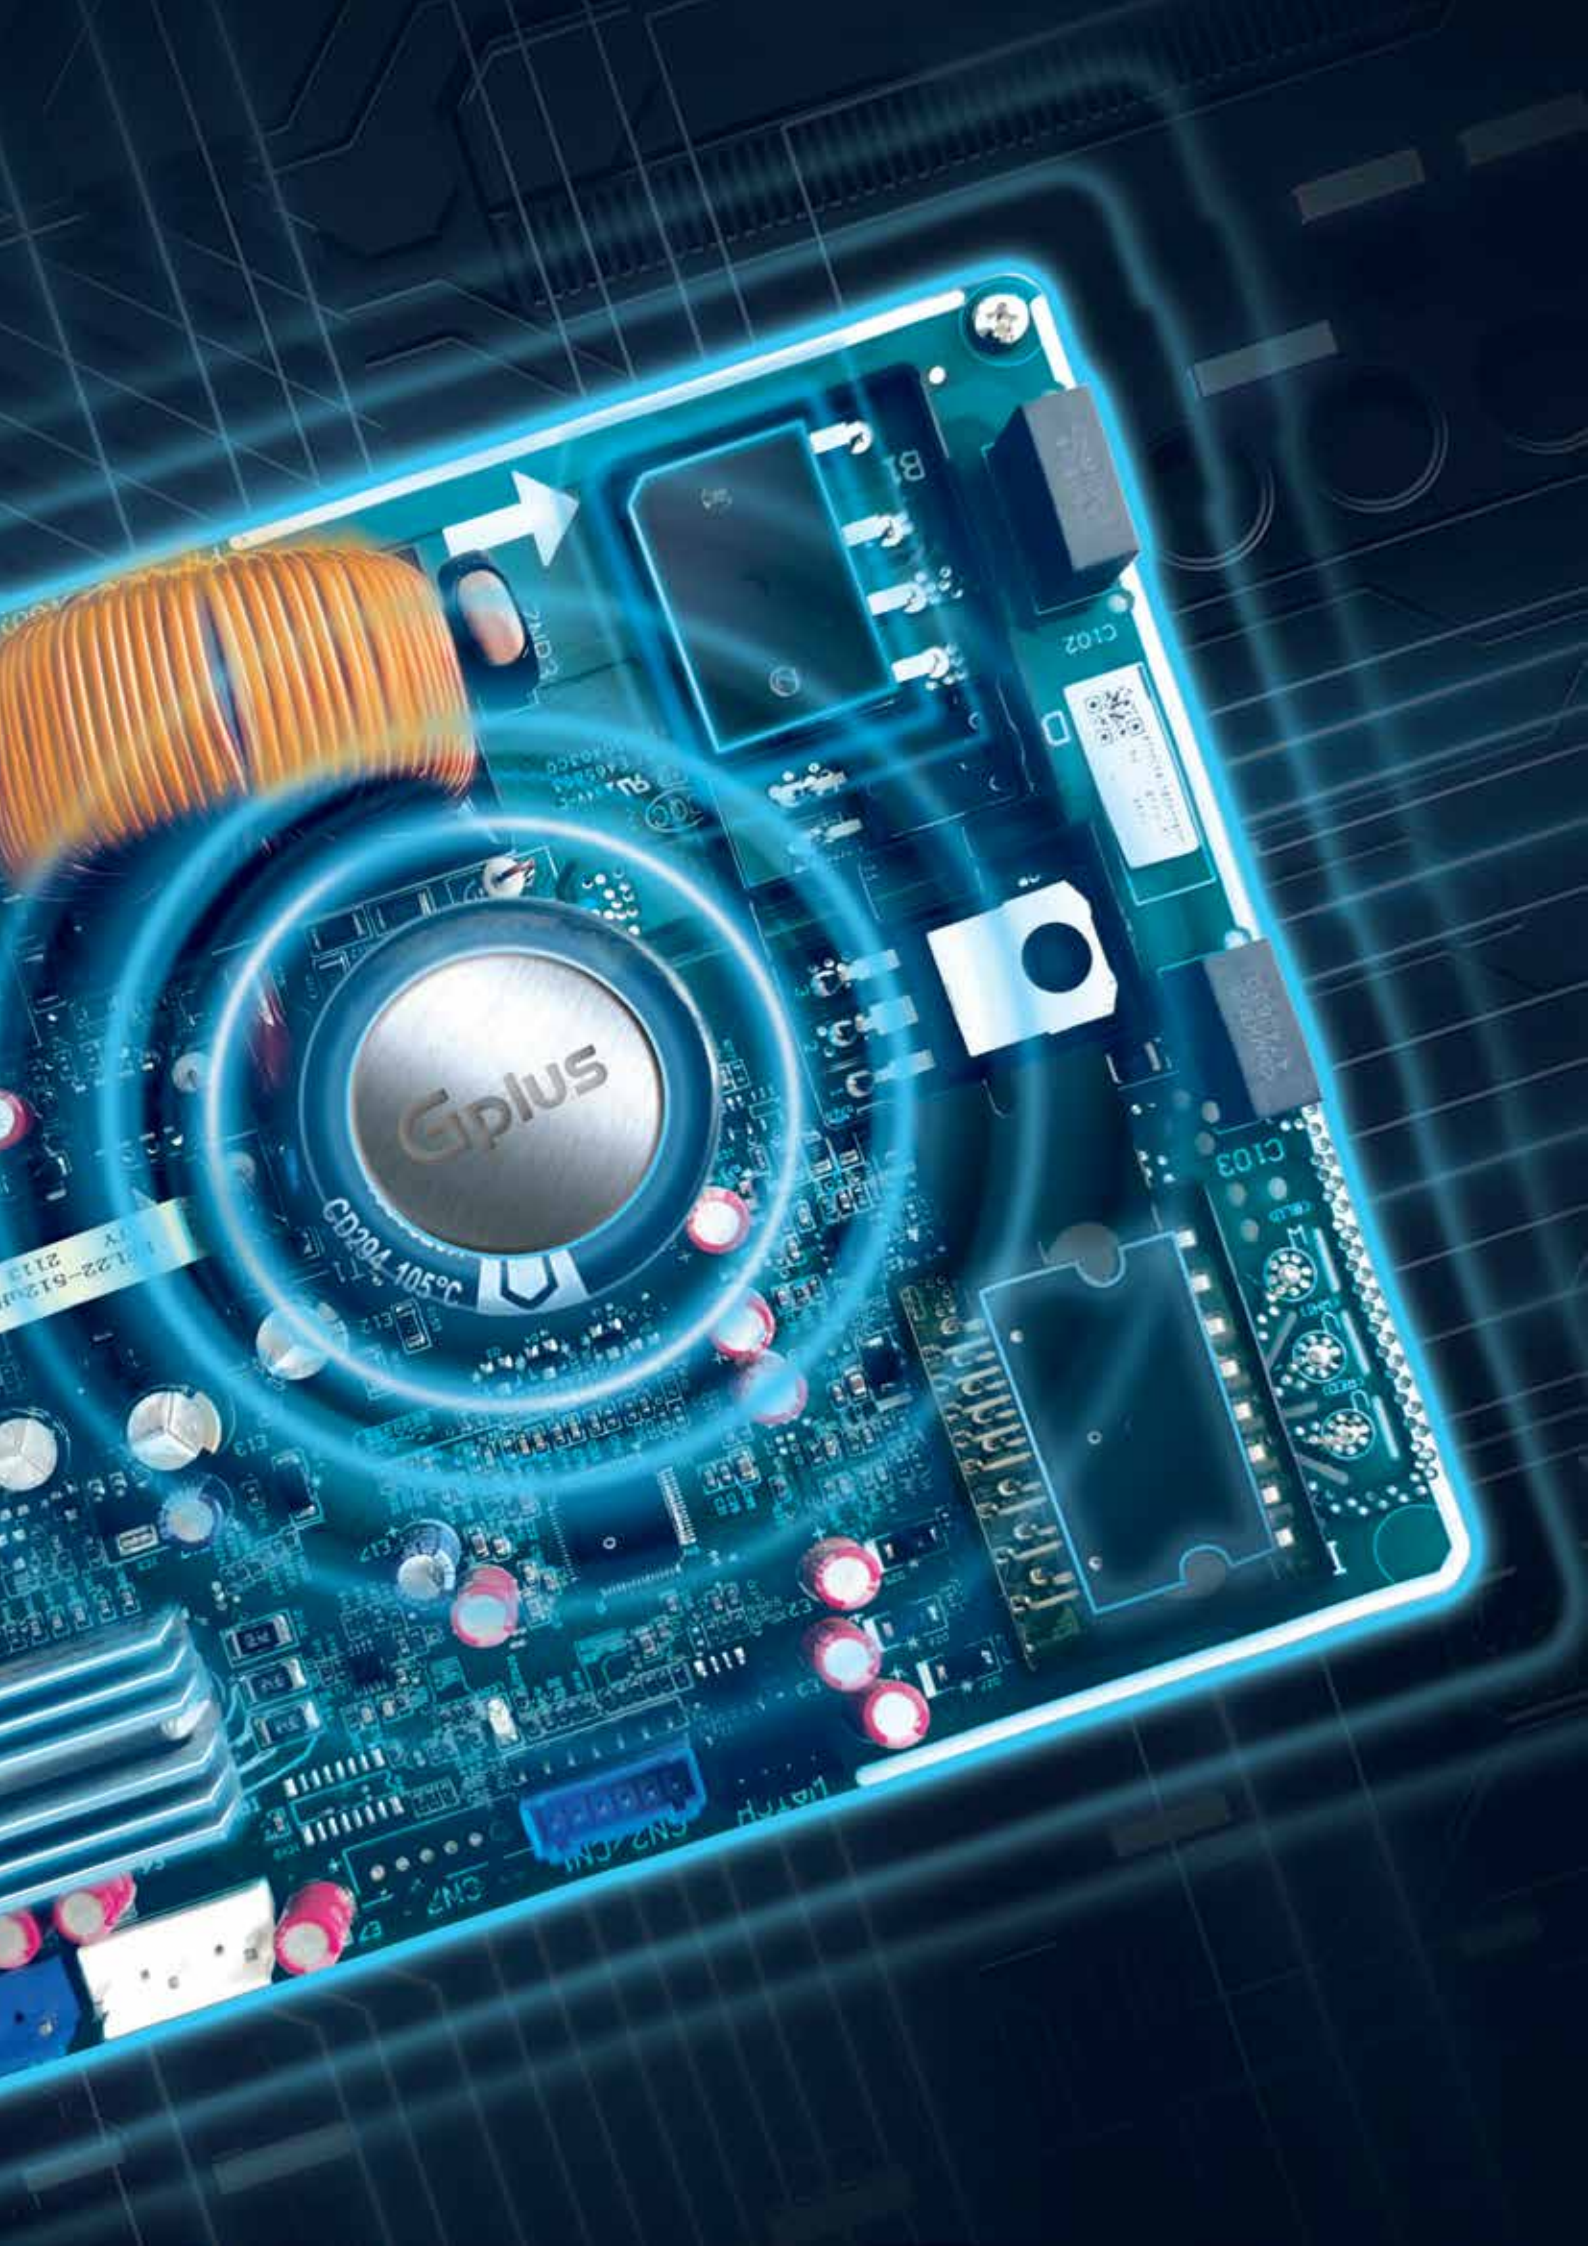

TWIN ROTARY



A modern outdoor lounge area featuring a wooden table and two white armchairs with cushions. The scene is set against a dark blue wall, with lush green plants in the foreground and background. A small potted plant sits on the table. The lighting is soft and warm, suggesting a sunset or sunrise setting.

| Twin Rotary
Compressor

Wall Mounted, ON/OFF Split

اسپلیت دیواری دور ثابت



Rapid
Cooling



Smart
Air Flow



Gentle
Cool Wind



Golden
Fin



3D
Air Flow



Gplus

- Smart Air Flow
- Non-Tropical Regions
- Operating Up to 48°C
- Golden Fin
- Rapid Cooling
- مجهز به جریان هوای هوشمند
- مناسب مناطق معتدل
- قابلیت کارکرد تا دمای ۴۸ درجه سانتی‌گراد
- مجهز به پره‌های طلایی کندانسور
- مجهز به سیستم سرمایش سریع



Elite Model



T-Pro Model

GAC-TF30EL1 (*)	GAC-TF24TP1 (*)	GAC-TF18TP1 (*)	GAC-TF12TP1 (*)	GAC-TF09TP1 (*)	واحد	مدل دستگاه
					.	تصویر پنل
30000	24000	18000	12000	9000	Btu/h	ظرفیت نامی سرمایشی T1**
30500	24500	18500	12500	9500	Btu/h	ظرفیت نامی گرمایشی T1**
2664/12.4	2131/9.9	1599/7.4	1066/4.8	799/3.6	W/A	جریان / توان مصرفی سرمایشی T1**
2470/11.5	1984/9.2	1498/6.9	1012/4.6	769/3.5	W/A	جریان / توان مصرفی گرمایشی T1**
1500	1340	800/800	500/520	500/520	CMH	میزان گردش هوا (گرمایش / سرمایش) پنل داخلی
3.30	3.30	3.30	3.30	3.30	W/W	بازدهی دستگاه در حالت سرمایش
3.62	3.62	3.62	3.62	3.62	W/W	بازدهی دستگاه در حالت گرمایش
R410A	R410A	R410A	R410A	R410A	-	گاز مبرد
52	53	42	35	35	db	حداکثر شدت صدا (پنل داخلی)
60	60	55	50	48	db	حداکثر شدت صدا (پنل خارجی)
تک فاز	تک فاز	تک فاز	تک فاز	تک فاز	Φ	نوع برق مصرفی
روتاری	روتاری	روتاری	روتاری	روتاری	-	نوع کمپرسور
Φ15.88(5/8")	***	Φ 12 (1/2")	Φ 9.52 (3/8")	Φ 9.52 (3/8")	mm/Inch	سایز لوله گاز (برگشت)
Φ 6 (1/4")	***	Φ 6 (1/4")	Φ 6 (1/4")	Φ 6 (1/4")	mm/Inch	سایز لوله مایع (رفت)
25	25	20	15	15	m	حداکثر لوله کشی
15	15	10	5	5	m	حداکثر ارتفاع لوله کشی
1191x360x258	1100x333x222	920x306x195	790x275x192	790x275x192	mm	ابعاد پنل داخلی (عمق x ارتفاع x عرض)
920x699x380	920x699x380	853x602x349	777x498x290	712x459x276	mm	ابعاد پنل خارجی (عمق x ارتفاع x عرض)
16	13.5	10	8.5	8	kg	وزن خالص پنل داخلی
48	47.5	31	25	22.5	kg	وزن خالص پنل خارجی
15°~48°	15°~48°	15°~48°	15°~48°	15°~48°	°C	محدوده دمایی سرمایش
-7°~27°	-7°~27°	-7°~27°	-7°~27°	-7°~27°	°C	محدوده دمایی گرمایش